




## SVELTO PLUS - Class B125

Designed for Domestic Sewer and Municipal applications that require an odour seal

### 100% watertight, composite access cover and frame Light weight and easy to handle

#### Features



- Cover and frame is EN124-5: 2015 compliant
- Flat-sided frame, making it suitable for brick-paved areas
- Light weight, easy to handle and install, up to 70% lighter than the iron equivalent
- Rigid and stable assembly due to the fibre reinforced composite frame
- EPDM seal fixed to the frame for water and odour seal\*
- Locking by four stainless steel M8 bolts
- Corrosion resistant even in the most aggressive environments
- No resale value to the scrap market
- Non-conductive of stray voltage or heat
- Coarse skid resistant upper surface featuring the trademarked 4L non-slip pattern
- UV resistant protective surface layer



Cover available in any RAL color



EPDM seal fixed to the frame for water and odour seal

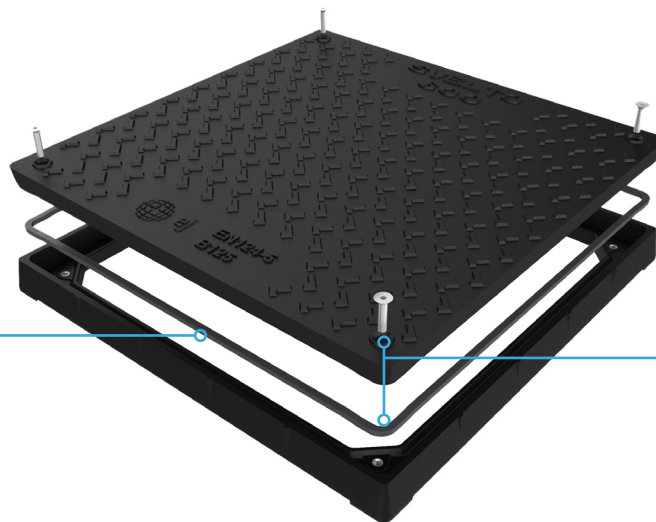

Watertight and secure due to 4 bolt security compressing the EPDM seal

product reference	class	product code	clear opening (mm)	overall dimensions (mm)	frame height (mm)	weight (kg)
SVELTO PLUS 400	B125	721050	300 x 300	400 x 400	44	6
SVELTO PLUS 500	B125	721051	400 x 400	500 x 500	44	8
SVELTO PLUS 600	B125	721052	500 x 500	600 x 600	44	12
SVELTO PLUS 700	B125	721053	600 x 600	700 x 700	44	15

\* Tested under 10 cm of water